


# GREASE INTERCEPTOR

## TEST PORT DRAWING


NOTES: IF THE TEST PORT STAND PIPE IS SUBJECT TO VEHICLE TRAFFIC IT MUST BE MADE OF MATERIAL THAT WILL SUPPORT THE LOAD.

INTERCEPTORS MUST HAVE A VENT ON BOTH THE INLET AND OUTLET SIDE.

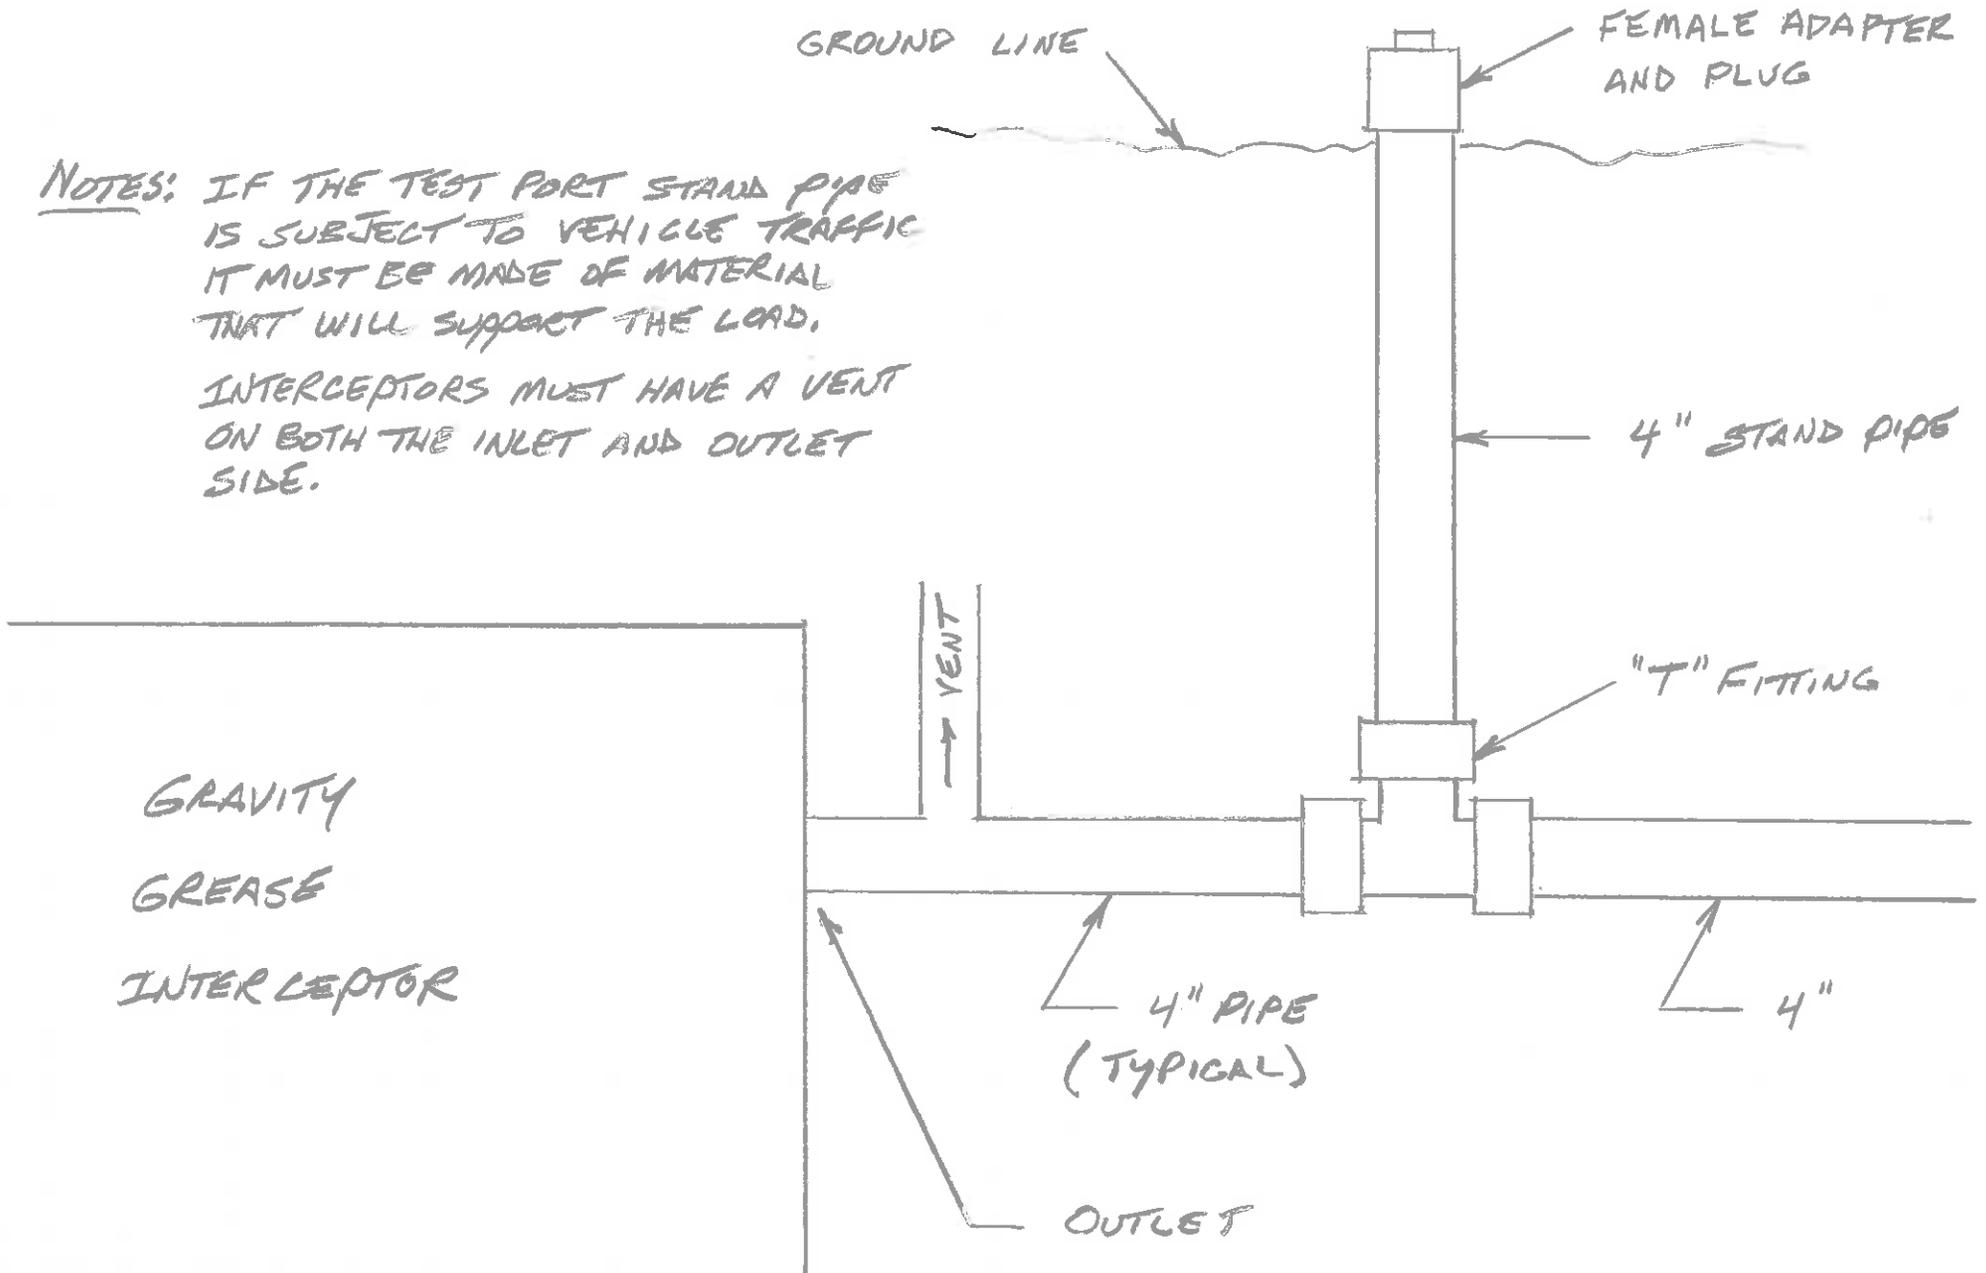

# GREASE INTERCEPTOR

## TEST PORT DRAWING

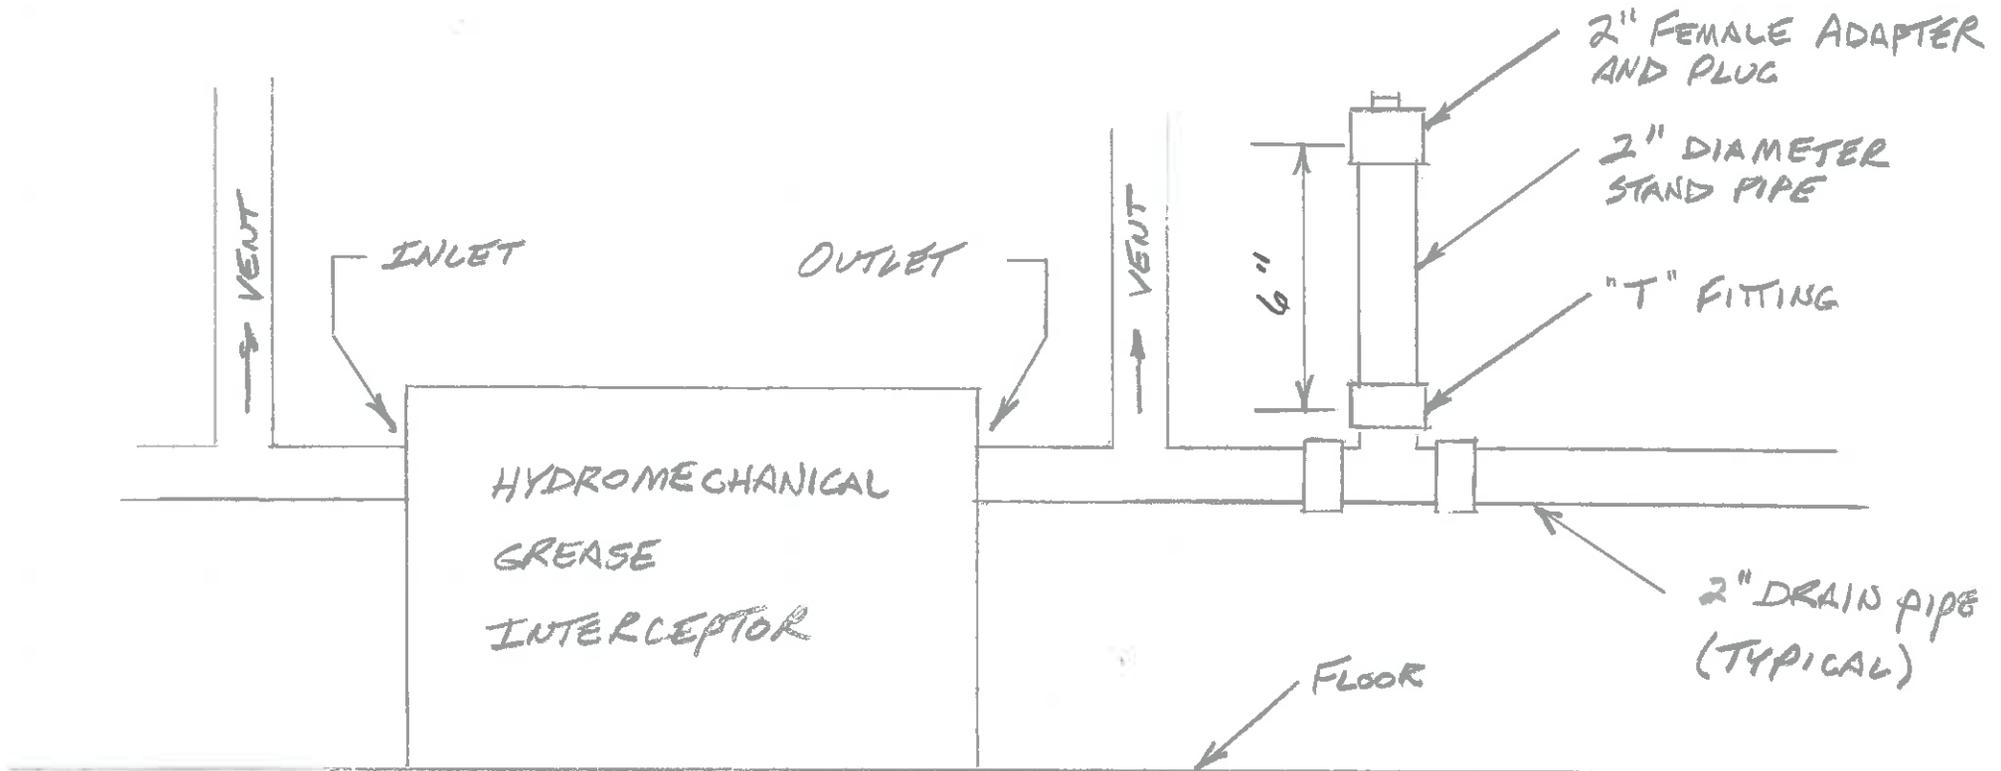

NOTE: IF INTERCEPTOR HAS AN INDIRECT WASTE AND IS BELOW THE FLOOR THEN THE TEST PORT STAND PIPE MUST RISE ABOVE THE FLOOR A MINIMUM OF 6".